


THERAFLO™ True Low Air Loss



• User friendly control panel

PrimaTex™ quilted nylon taffeta cover

Twenty 8" tall air cells

Reduced pressure in heel air cells

80 vent holes for superior air loss

Integrated 2" convoluted foam base

Bariatric width mattresses available

Microprocessor controlled

1,000 lb capacity

Inflates in 15 seconds

2 stage blower – 1,850 lit/min

Other features include:


Upright Mode, Panel Lock, and Max Inflate

Technology, Versatility, Results...


The TheraFlo by Tridien Medical™ is a powered low air loss mattress replacement system designed to treat and prevent pressure ulcers Stage I-IV. The high performance blower allows dealers to utilize both standard width and bariatric widths of mattresses with one power unit for patients weighing up to 1,000 lbs. The TheraFlo is made of the highest quality materials making it durable and reliable for homecare, long-term care, and acute-care environments. **Recommended Medicare Code E0277**

PRESSURE MAPPING

The TheraFlo provides constant low pressure by redistributing the patient's body over a greater area than a standard mattress.

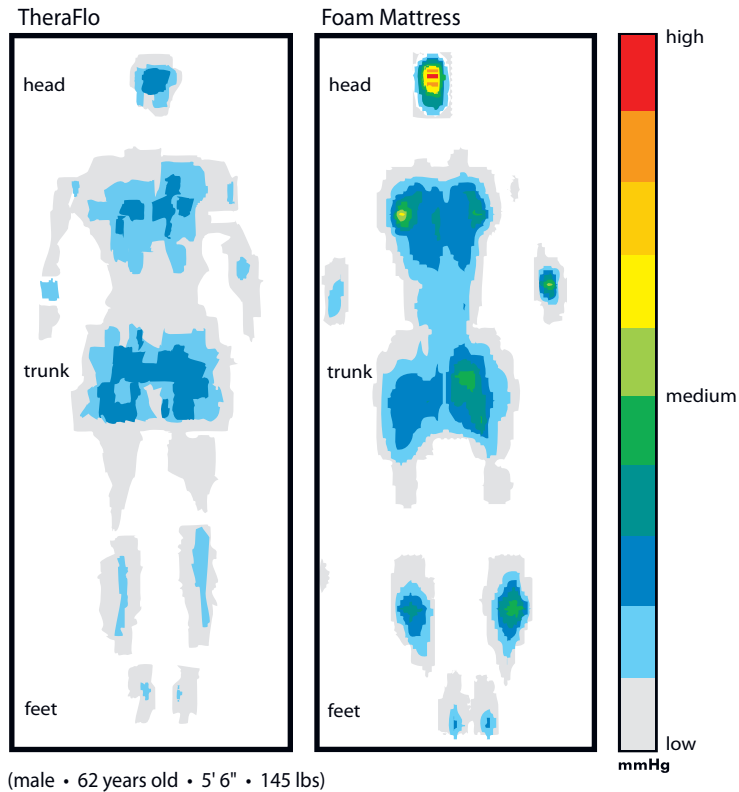


TECHNICAL INFORMATION




TheraFlo™ Power Unit:

- Microprocessor controlled with user friendly control panel
- Hi-performance blower allows standard mode and bariatric modes to be built into one unit
- Max Inflate mode inflates mattress to maximum pressure within seconds to help with transfers and nursing procedures
- Panel Lock mode locks out control panel to avoid tampering of settings
- Upright mode gives added support while in the articulated position to help prevent "bottoming out"
- Warranty: 2 years



TheraFlo™ Mattress Replacements:


- Twenty 8" tall air cells provide deep immersion of patient for low interface pressures
- 2" convoluted foam base
- Multiple widths available including: 36", 39", 42", 48", 54" and 60"
- 1,000 lb capacity
- Warranty: 1 year

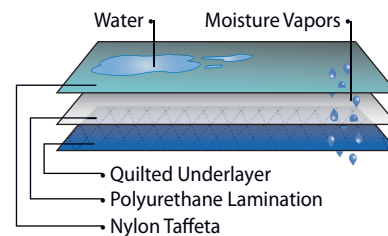

PrimaTex™ Cover:

- Waterproof yet breathable (moisture vapor permeable)
- Drastically reduces shear/friction
- Specially treated with anti-bacterial/anti-microbial agents that resist mold and mildew
- Loose fitting to conform to patient's body
- Complies with Cal. Tech. Bulletin #117
- Warranty: 1 year

STANDARD FEATURES



Removable air cells with directional snaps facilitate easy cleaning and replacement.



Unique 3-way holding strap helps provide support and prevents bottoming out.

MATTRESS OPTIONS

One power unit operates multiple widths of mattresses to help reduce inventory costs.



SPECIFICATIONS: US Models #PT2000-36, PT2000-39, PT2000-42, PT2000-48, PT2000-54, PT2000-60

Electrical	Input Voltage: 110-120 VAC, 50-60Hz	European Model #PT2000-EU	Input Voltage: 220-240 VAC, 50Hz
Approvals	UL 60601-1 • CAN/CSA C22.2 No. 601.1	TUV, IEC 60601-1, 60601-1-2	
Dimensions	Pump: 14" x 6.5" x 12" • Mattress 80" x 36" x 10" • Bariatric widths: 39", 42", 48", 54", and 60"	Pump: 35.5cm x 16.5cm x 30.5cm • Mattress: 193cm x 88cm x 25cm	
Weight	Pump: 11 lbs • Mattress 27 lbs	Pump: 5 kgs • Mattress: 12 kgs	



TheraFlo™ is a trademark of Tridien Medical™. Specifications subject to change without prior notice.

PRI-003



4200 NW 120th Ave • Coral Springs, FL 33065
Tel: 954.340.0500 • Fax: 954.340.0511
www.tridien.com • info@tridien.com